


A B C D E F G H J K L


NOISE LEVEL 1-10DS BLAST UNIT WITH 6-54 DUST COLLECTOR

NOTES:

TEST DATE: 12/19/02
 TEST APPARATUS: SIMPSON MODEL 886
 SOUND LEVEL METER TYPE 2
 AMBIENT NOISE LEVEL: 70 dBA
 LOCATION: BLASTRAC; 11,600 sq. ft.
 ENCLOSED MANUFACTURING FACILITY
 ALL READING +/- 2 dBA

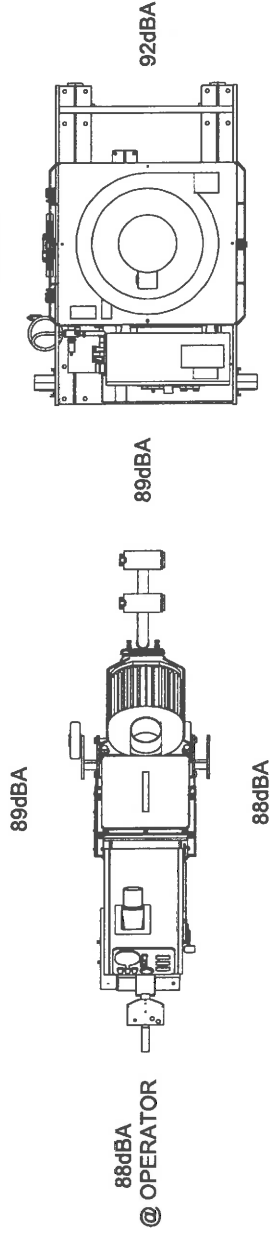

NORMAL BLASTING CONDITION
 SURFACE: STEEL
 RANGE: 3 FEET

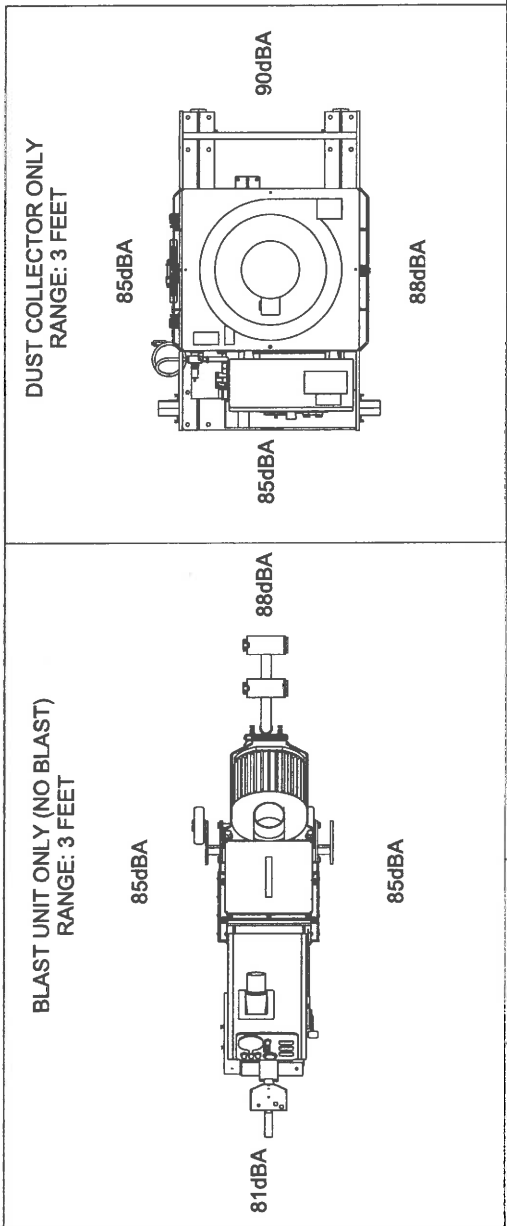

BY DOUBLING THE DISTANCE AND SUBTRACTING 7 dBA FROM THE RECORDED SOUND LEVELS, A PERSON CAN OBTAIN SOUND LEVEL READINGS AT ANY GIVEN DISTANCE. FOR EXAMPLE, A 100 dBA SOUND LEVEL READING TAKEN AT 5 FEET WOULD RESULT IN A 93 dBA SOUND LEVEL READING AT 10 FEET IF THE MACHINE WAS OPERATING UNDER THE SAME CONDITIONS AS THE CONDITIONS THAT THE 100 dBA SOUND LEVEL READING WAS RECORDED.

COMPLY WITH OSHA AND ANY OTHER APPLICABLE STANDARDS FOR DETERMINING THE PROPER TYPE OF HEARING PROTECTION AND EVALUATING NOISE LEVELS AT THE EQUIPMENT WORKSITE. SOUND LEVEL READINGS WILL VARY WITH EACH MACHINE AND MACHINE OPERATING CONDITIONS (DRIVE MOTOR RPM, SHOT LOADING, ETC.). APPROPRIATE HEARING PROTECTION IS REQUIRED WHEN OPERATING THIS EQUIPMENT AND ALSO RECOMMENDED FOR ANYONE WORKING NEAR THE EQUIPMENT DURING OPERATION.

NOISE LEVELS SHOWN ON THIS DRAWING ARE PROVIDED FOR REFERENCE ONLY. THE EQUIPMENT USER IS RESPONSIBLE FOR DETERMINING THE LEVEL OF NOISE EXPOSURE AT THE WORKSITE AND PROVIDING APPROPRIATE NOISE PROTECTION.

REV	ZONE	DESCRIPTION	DATE	BY	NOISE
REVISION					
THIS DRAWING AND THE CORRESPONDING PARTS LIST ARE THE PROPERTY OF U.S. FILTER, INC. ANY REPRODUCTION OR USE OF EITHER THEREOF WITHOUT WRITTEN CONSENT IS PROHIBITED.					
U.S. FILTER BLASTRAC					
TOLERANCE MACHINING					
8215 ALUMA VALLEY DRIVE OKLAHOMA CITY, OK 73121 U.S.A.					
NOISE LEVEL READINGS					
1-10DS BLAST UNIT & 6-54 DUST COLLECTOR					
SCALE: 1:10 DRAWN: PTR					
DATE: 12/19/02					
400-SD020					