



# SAFETY TAILGATE MEETING

Generated by Safety Compliance App [www.safetycompliance.com](http://www.safetycompliance.com) | [www.safetycomplianceapp.com](http://www.safetycomplianceapp.com)

Company	Ultimate Internet Access		Project	HQ Installer	
Date	December 06, 2022	Time	8:05 AM	Conductor	Kevin Rhodes

## LADDER SAFETY

### INTRODUCTION

When used correctly ladders can be an effective means to access work levels and to accomplish work. However, they are also dangerous. More falls occur from ladders than any other piece of equipment. To remain safe we must use them correctly and only after being trained and authorized to do so.

#### Group Discussion:

- Have you ever experienced or seen an injury from using a ladder?
- What happened? Why did it happen?
- What can we learn from it?

In this training we will discuss:

#### (1) INSPECTING LADDERS

#### (2) USING LADDERS SAFELY

#### (3) CHOOSING THE RIGHT LADDER

### INSPECTING LADDERS

All ladders must be inspected before each use, including:

- Ensure there is no damage, lack of structural integrity, missing components or loose parts.
- The steps or rungs must be in good condition, tight and secure to the side rails.
- Ensure movable parts operate correctly.
- They must be free of oil, grease, and other slippery materials.
- All manufacturer labeling must clearly be in place.
- Only set them up in a safe area for use.

Immediately remove damaged or unsafe ladders from service and notify your supervisor.

# USING LADDERS SAFELY

## FOR SAFE USE:

- Maintain at least 3 points of contact when climbing or descending a ladder. (Two hands and a foot or two feet and a hand).
- To keep your hands free, do not carry material up or down ladders.
- Stay near the middle of the ladder, always face the ladder and never over reach.
- Only place ladders on a stable, level surface that is not slippery.
- Use barricades when necessary to keep traffic away from the ladder.
- Do not set up within 10' of a power line or use metal ladders near any electricity.
- Do not use a ladder for other than it is intended. For example, do not use a folded step ladder.
- Never climb above the top two steps of a ladder.
- **Extension ladders** are to be set up at a 4:1 pitch, extend at least 3' above the platform of access, and be secured.

# CHOOSING THE RIGHT LADDER

Never exceed the weight limit! Only use Type 1, 1A, or 1AA ladders.

Type:	Weight Rating:	Duty Rating:
1-AA	375 pounds	Super Heavy Duty
1-A	300 pounds	Extra Heavy Duty
1	250 pounds	Heavy Duty Industrial
2	225 pounds	Medium Duty
3	200 pounds	Commercial Light Duty Household

---

### Attendees Names

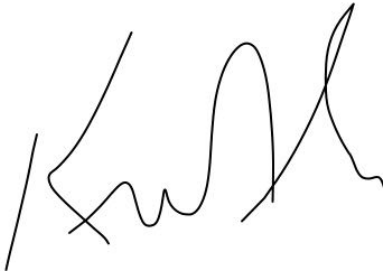
Dylan Rhodes  
Grant Harkness  
Nate Peters  
Joseph Argueta

### Attendees Signatures

N/A  
N/A  
N/A  
N/A

---

# CONDUCTOR SIGNATURE

A handwritten signature in black ink, consisting of several loops and a long horizontal stroke, positioned in the upper left quadrant of the page.

Copyright ©2018 Safety Compliance Company. All rights reserved. This document is intended as a safety tailgate meeting and does not contain all OSHA regulations. Please refer to OSHA and other state and federal agencies for further and current regulations. Not to be duplicated or distributed for use without the express written consent of Safety Compliance Company